

ASIA

by 6366 DownTown





USE LED FEATURES



















IP20 IK 05

220-240 V 50/60 Hz

RG 0

DESCRIPTION

Suspension lamp for direct non-glare lighting. Metal structure with laser-cut details. All versions have the inside of the diffuser painted white to improve light reflection. Painted metal top cover to match the color of the structure. The white version has a red cotton covered power cable, the black version has a white cotton covered power cable. Suspensions 350 and 550 have steel support ropes. Screen made of opal polycarbonate, specifically for Led, which combines maximum brightness with the ability to avoid the spot effect of Led. Equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut metal dissipating plate. Built-in electronic ballast. DM version equipped with dimmable power supply with DALI/PUSH interface. All electronic ballasts are equipped with thermal and short-circuit protection against overloading and overvoltage.



SETTLEMENT CODE

Complete the code by entering the number corresponding to the desired color in the space provided $\ \square$

STANDARD COLORS

120

350

RAL 9016 - Matt white: 1


RAL 9005 - Matt black: 7

other colors on request

| ASIA 250 | IP20 | TYPE | POWER | FLUX ¹ |
|-----------|------|------|-------|-------------------|
| Ø 120 | | LED | 8W | 1090lm |
| 1200 | | | | |
| <u>85</u> | | | | |

| • | CCT 3000°K CRI>90 | CCT 4000°K CRI>90 | | |
|---|----------------------|----------------------|--|--|
| | L006 .W | L006 .N | | |

CCT 3000°K CCT 4000°K ୍ମ IP20 TYPE POWER FLUX¹ **ASIA 350** CRI>90 CRI>90 Ø 160 LED 15W 2070lm L007 .W L007 1200

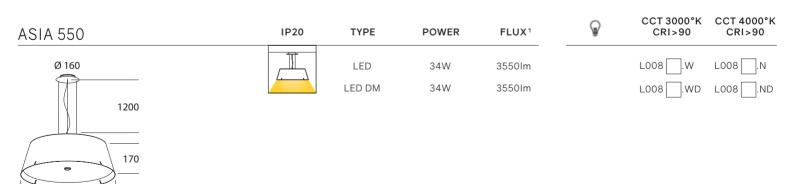

Brightest LED versions on request

550



ASIA

by 6366 DownTown





USE LED FEATURES

















IP20 IK 05

220-240 V

50/60 Hz

| | RG 0

DESCRIPTION

Table lamps for direct non-glare lighting. Metal frame with laser-cut details. All versions have the inside of the diffuser painted white to improve light reflection. The white version has a red cotton covered power cable, the black version has a white cotton covered power cable. Screen made of opal polycarbonate, specifically for Led, which combines maximum brightness with the ability to avoid the spot effect of Led. Equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut metal dissipating plate. Built-in electronic ballast. All the electronic ballasts are equipped with thermal and short-circuit protection, against overvoltage and overloading. All lamps are equipped with cable switch and 2-pin 10A plug.

CRI>90



SETTLEMENT CODE


Complete the code by entering the number corresponding to the desired color in the space provided $\ \square$


STANDARD COLORS

RAL 9016 - Matt white: 1

RAL 9005 - Matt black: 7

other colors on request

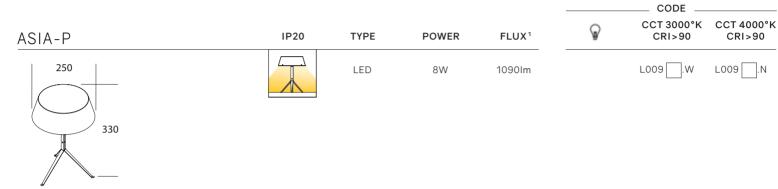

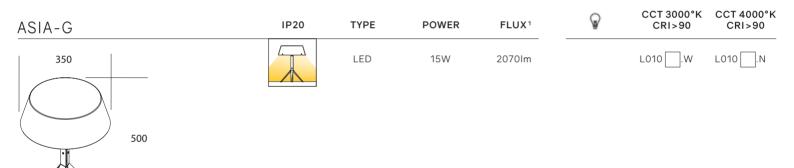

Brightest LED versions on request



ASIA

by 6366 DownTown





USE LED FEATURES

















IP20 IK 05

220-240 V Hz

^{0/60} RG 0

DESCRIPTION

Wall lamps for direct non-glare lighting. Metal frame with laser-cut details. All versions have the inside of the diffuser painted white to improve light reflection. The white version has a red cotton covered power cable, the black version has a white cotton covered power cable. Screen made of opal polycarbonate, specifically for Led, which combines maximum brightness with the ability to avoid the spot effect of Led. Equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut metal dissipating plate. Built-in electronic ballast. All the electronic ballasts are equipped with thermal and short-circuit protection, against overvoltage and overloading.



SETTLEMENT CODE

Complete the code by entering the number corresponding to the desired color in the space provided $\ \square$

STANDARD COLORS

RAL 9016 - Matt white: 1

RAL 9005 - Matt black: 7

other colors on request

| | | | | | CODE | | |
|----------|------|------|-------|-------------------|------|----------------------|----------------------|
| ASIA-AP | IP20 | TYPE | POWER | FLUX ¹ | ₩ | CCT 3000°K CRI>90 | CCT 4000°K CRI>90 |
| Ø 250 | | LED | 8W | 1090lm | | L011 .W | L011 |
| 225 Ø 65 | | | | | | | |
| 265 | | | | | | | |

Brightest LED versions on request