

BIANCOLATTE

by 6366 DownTown






USE

LED



FEATURES

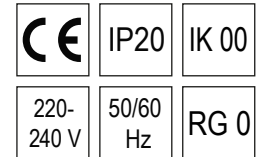







DESCRIPTION

Multiple suspension consisting of several light points, whose arrangement and cable length can be adjusted at will, free and independent installation is possible. Ideal for all environments where a diffused and enveloping light is required. Opal triplex blown glass diffuser satin finish. Painted metal structure, top cover and cable clamp. Power cable covered in cotton coordinated with the color of the structure. Led version equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut aluminium dissipating plate. Electronic ballast incorporated in the top cover. DM version equipped with dimmable control gear with DALI/PUSH interface. All the electronic ballasts are equipped with thermal and short-circuit protection, against overvoltage and overloading.

SETTLEMENT CODE


Complete the code by entering the number corresponding to the desired color in the space provided


STANDARD COLORS


	RAL 9016 - Matt white: 1
	RAL 9005 - Matt black: 7
	Embossed cord: 9
	Satin chrome color: 0
	Satin gold color: 2
	Satin copper color: 3

other colors on request


BIANCOLATTE 140/3

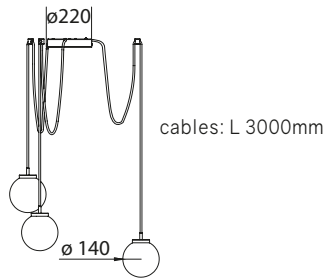



IP20	TYPE	POWER	FLUX ¹
	G9 LED	3x7W*	3x650lm*
	LED	24W	2910lm

CODE	CCT 3000°K CRI>90	CCT 4000°K CRI>90
 L021 <input type="checkbox"/> .G9		
	L021 <input type="checkbox"/> .W	L021 <input type="checkbox"/> .N

BIANCOLATTE 140/6

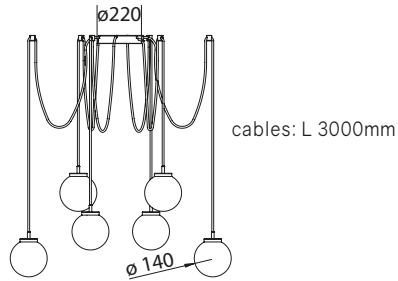

IP20	TYPE	POWER	FLUX ¹
	G9 LED	6x7W*	6x650lm*
	LED	48W	5820lm
	LED DM	48W	5820lm

CODE	CCT 3000°K CRI>90	CCT 4000°K CRI>90
 L022 <input type="checkbox"/> .G9		
	L022 <input type="checkbox"/> .W	L022 <input type="checkbox"/> .N
	L022 <input type="checkbox"/> .WD	L022 <input type="checkbox"/> .ND

Other version on request

*Suggested value - light source not supplied

¹Nominal luminous flux
LED DM: dimmable DALI - PUSH

BIANCOLATTE

by 6366 DownTown







USE

LED



FEATURES









DESCRIPTION

Multiple suspension consisting of several light points, whose arrangement and cable length can be adjusted at will, free and independent installation is possible. Ideal for all environments where a diffused and enveloping light is required. Opal triplex blown glass diffuser satin finish. Painted metal structure, top cover and cable clamp. Power cable covered in cotton coordinated with the color of the structure. Led version equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut aluminium dissipating plate. Electronic ballast incorporated in the top cover. DM version equipped with dimmable control gear with DALI/PUSH interface. All the electronic ballasts are equipped with thermal and short-circuit protection, against overvoltage and overloading.

SETTLEMENT CODE


Complete the code by entering the number corresponding to the desired color in the space provided


STANDARD COLORS


	RAL 9016 - Matt white: 1
	RAL 9005 - Matt black: 7
	Embossed cord: 9
	Satin chrome color: 0
	Satin gold color: 2
	Satin copper color: 3

other colors on request


BIANCOLATTE 250/3

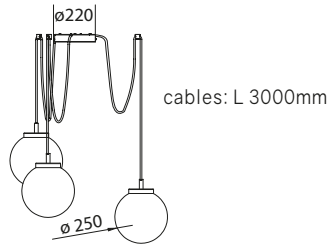



IP20	TYPE	POWER	FLUX ¹
	E27	3x8W*	3x880lm*
	LED	39W	4080lm
	LED DM	39W	4080lm

CODE	CCT 3000°K CRI>90	CCT 4000°K CRI>90
		
L024 <input type="checkbox"/> .IN	L024 <input type="checkbox"/> .W	L024 <input type="checkbox"/> .N
	L024 <input type="checkbox"/> .WD	L024 <input type="checkbox"/> .ND


BIANCOLATTE 350/3

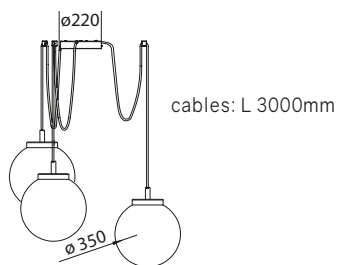


IP20	TYPE	POWER	FLUX ¹
	E27	3x10W*	3x1100lm*
	LED	48W	5820lm
	LED DM	48W	5820lm

CODE	CCT 3000°K CRI>90	CCT 4000°K CRI>90
		
L026 <input type="checkbox"/> .IN	L026 <input type="checkbox"/> .W	L026 <input type="checkbox"/> .N
	L026 <input type="checkbox"/> .WD	L026 <input type="checkbox"/> .ND

BIANCOLATTE MIX/3

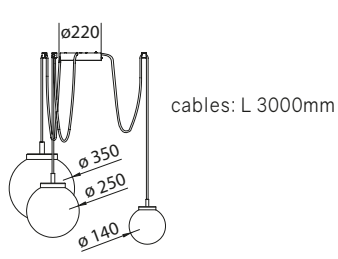

IP20	TYPE	POWER	FLUX ¹
	G9 LED+E27	25W*	2630lm*

CODE
 
L166 <input type="checkbox"/> .IN

BIANCOLATTE MIX is a module that you can create yourself, following your fantasy. Let choice the number of balls and their diameters, color of the structure and lenght of the cables.

Brightest LED versions on request

Other version on request

*Suggested value - light source not supplied

¹Nominal luminous flux
LED DM: dimmable DALI - PUSH

BIANCOLATTE

by 6366 DownTown







USE

LED



FEATURES









DESCRIPTION

Single suspension for diffused and enveloping light. Opal triplex blown glass diffuser satin finish. Painted metal structure and top cover. Power cable covered in cotton coordinated with the color of the structure. Led version equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut aluminium dissipating plate. Electronic ballast incorporated in the top cover. DM version equipped with dimmable control gear with DALI/PUSH interface. All the electronic ballasts are equipped with thermal and short-circuit protection, against overvoltage and overloading.

SETTLEMENT CODE


Complete the code by entering the number corresponding to the desired color in the space provided


STANDARD COLORS


	RAL 9016 - Matt white: 1
	RAL 9005 - Matt black: 7
	Embossed cord: 9
	Satin chrome color: 0
	Satin gold color: 2
	Satin copper color: 3

other colors on request


BIANCOLATTE 140





IP20	TYPE	POWER	FLUX ¹
	G9 LED	1x7W*	1x650lm*
	LED	8W	970lm

CODE	CCT 3000°K CRI>90	CCT 4000°K CRI>90
 L020 <input type="checkbox"/> .G9	L020 <input type="checkbox"/> .W	L020 <input type="checkbox"/> .N


BIANCOLATTE 250





IP20	TYPE	POWER	FLUX ¹
	E27	1x8W*	1x880lm*
	LED	13W	1360lm
	LED DM	13W	1360lm

CODE	CCT 3000°K CRI>90	CCT 4000°K CRI>90
 L023 <input type="checkbox"/> .IN	L023 <input type="checkbox"/> .W	L023 <input type="checkbox"/> .N
	L023 <input type="checkbox"/> .WD	L023 <input type="checkbox"/> .ND

BIANCOLATTE 350



IP20	TYPE	POWER	FLUX ¹
	E27	1x10W*	1x1100lm*
	LED	16W	1940lm
	LED DM	16W	1940lm

CODE	CCT 3000°K CRI>90	CCT 4000°K CRI>90
 L025 <input type="checkbox"/> .IN	L025 <input type="checkbox"/> .W	L025 <input type="checkbox"/> .N
	L025 <input type="checkbox"/> .WD	L025 <input type="checkbox"/> .ND

Brightest LED versions on request (excluded Ø140)

Other version on request

*Suggested value - light source not supplied

¹Nominal luminous flux
LED DM: dimmable DALI - PUSH

BIANCOLATTE

by 6366 DownTown





USE

LED



FEATURES









DESCRIPTION

Wall lamp for diffused and enveloping light. Opal triplex blown glass diffuser satin finish. Painted metal structure. Led version equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut aluminium dissipating plate. Built-in electronic ballast. All electronic ballasts are equipped with thermal and short-circuit protection against overloading and overvoltage.

SETTLEMENT CODE


Complete the code by entering the number corresponding to the desired color in the space provided

STANDARD COLORS


	RAL 9016 - Matt white: 1
	RAL 9005 - Matt black: 7
	Embossed cord: 9
	Satin chrome color: 0
	Satin gold color: 2
	Satin copper color: 3

other colors on request

BIANCOLATTE APS



IP44



TYPE

G9 LED
LED

POWER

1x7W*
8W

FLUX¹

1x650lm*
800lm

CODE



CCT 3000°K
CRI>90

CCT 4000°K
CRI>90

L027 .G9

L027 .W

L027 .N

Other version on request

*Suggested value - light source not supplied

¹Nominal luminous flux