

BIPLAN




by KD Lab



USE

LED

FEATURES







DESCRIPTION

Wall lamp, with double emission, suitable for direct and indirect light simultaneously. Structure in extruded aluminium alloy 6060/T6. Die-cast aluminium details. Polyester powder coating and phosphate treatment to increase corrosion resistance. Diffuser made of opal polycarbonate, specific for Led, which combines maximum brightness with the ability to avoid the dot effect of Led. AISI 316 stainless steel screws. Silicone gasket suitable to withstand very high temperatures. Equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut metal dissipating plate. Built-in electronic ballast. DM version equipped with dimmable power supply with DALI/PUSH interface. All electronic ballasts are equipped with thermal and short-circuit protection against overloading and overvoltage. Wiring for direct and indirect light with separate switching.

SETTLEMENT CODE


Complete the code by entering the number corresponding to the desired color in the space provided



STANDARD COLORS


	RAL 9016 - Embossed white: 1
	RAL 9007 - Embossed grey: 6
	RAL 9005 - Embossed black: 7
	Rust: 8

other colors on request


BIPLAN 30

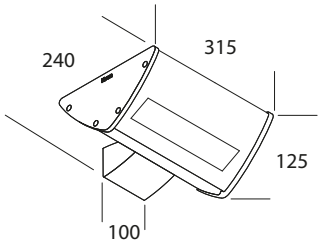




IP65	TYPE	POWER	FLUX ¹
	LED	35W	4680lm
	LED DM	35W	4680lm

	CODE	
	CCT 3000°K CRI>90	CCT 4000°K CRI>90
	L028 <input type="checkbox"/> .W	L028 <input type="checkbox"/> .N
	L028 <input type="checkbox"/> .WD	L028 <input type="checkbox"/> .ND

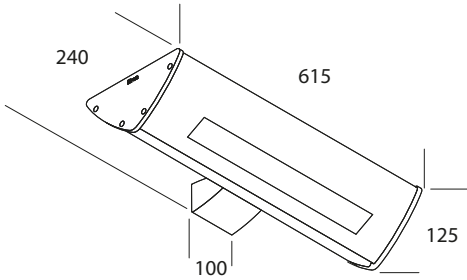BIPLAN 60



IP65	TYPE	POWER	FLUX ¹
	LED	69W	9390lm
	LED DM	69W	9390lm

	CODE	
	CCT 3000°K CRI>90	CCT 4000°K CRI>90
	L029 <input type="checkbox"/> .W	L029 <input type="checkbox"/> .N
	L029 <input type="checkbox"/> .WD	L029 <input type="checkbox"/> .ND

Brightest LED versions on request

Other version on request

¹Nominal luminous flux
LED DM: dimmable DALI - PUSH

