


DELTA


by KD Lab




USE



LED



FEATURES



DESCRIPTION

Ceiling or wall lamp for diffused lighting. Diffuser in matt opal blown glass with bayonet coupling system. Internal base in self-extinguishing polycarbonate. Metal edge, with galvanic finish, for indoor versions. Aluminium edge, with polyester powder coating and phosphate treatment to increase corrosion resistance, for outdoor versions. Rubber foam gasket. Led version equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut metal dissipating plate. Built-in electronic ballast. DM version equipped with dimmable power supply with DALI/PUSH interface. All the electronic ballasts are equipped with thermal and short-circuit protection, against overvoltage and overload. EM version, in always-on mode, is equipped with an environmentally friendly NiMH (nickel-metal hydride) battery, thanks to the absence of cadmium. The EM version is equipped with a battery status indicator Led.

SETTLEMENT CODE


Complete the code by entering the number corresponding to the desired color in the space provided

STANDARD COLORS




other colors on request

DELTA



IP65



TYPE

POWER

FLUX¹

E27	2x10W*	2x1100lm*
LED	15W	1860lm
LED DM	15W	1860lm
LED EM	15W	1860lm

CODE



CCT 3000°K
CRI > 90

CCT 4000°K
CRI > 90

L047 .IN

L047 .W L047 .N

L047 .WD L047 .ND

L047 .WE1 L047 .NE1

Brightest LED versions on request


Other version on request

*Suggested value - light source not supplied
LED EM: emergency 1h standard - 3h on request


¹Nominal luminous flux
LED DM: dimmable DALI - PUSH

DELTA


by KD Lab

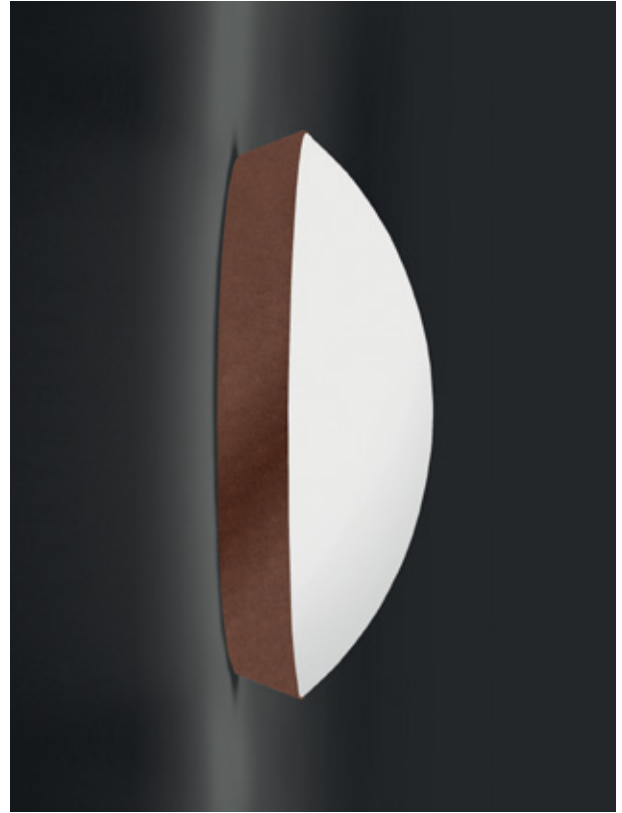


USE



LED



FEATURES




DESCRIPTION

Ceiling or wall lamp for diffused lighting. Diffuser in matt opal blown glass with bayonet coupling system. Internal base in self-extinguishing polycarbonate. Metal edge, with galvanic finish, for indoor versions. Aluminium edge, with polyester powder coating and phosphate treatment to increase corrosion resistance, for outdoor versions. Rubber foam gasket. Led version equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut metal dissipating plate. Built-in electronic ballast. DM version equipped with dimmable power supply with DALI/PUSH interface. All the electronic ballasts are equipped with thermal and short-circuit protection, against overvoltage and overload. EM version, in always-on mode, is equipped with an environmentally friendly NiMH (nickel-metal hydride) battery, thanks to the absence of cadmium. The EM version is equipped with a battery status indicator Led.

SETTLEMENT CODE


Complete the code by entering the number corresponding to the desired color in the space provided

STANDARD COLORS




other colors on request

DELTA



IP65



TYPE	POWER	FLUX ¹
E27	2x10W*	2x1100lm*
LED	15W	1860lm
LED DM	15W	1860lm
LED EM	15W	1860lm

CODE

Lightbulb icon	CODE	
	CCT 3000°K CRI>90	CCT 4000°K CRI>90
L047 <input type="checkbox"/> .IN	L047 <input type="checkbox"/> .W	L047 <input type="checkbox"/> .N
	L047 <input type="checkbox"/> .WD	L047 <input type="checkbox"/> .ND
	L047 <input type="checkbox"/> .WE1	L047 <input type="checkbox"/> .NE1

Brightest LED versions on request

Other version on request

*Suggested value - light source not supplied
LED EM: emergency 1h standard - 3h on request

¹Nominal luminous flux
LED DM: dimmable DALI - PUSH