

MASK




by KD Lab



USE

LED

FEATURES

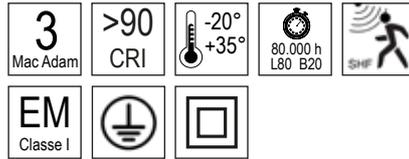

DESCRIPTION

Wall or ceiling lamp for diffused lighting. Base and ring in matt black or matt white polycarbonate. opal polycarbonate diffuser, specific for Led, which combines maximum brightness with the ability to avoid the spot effect of Led. Adhesive black forex inner mask to hide the spot effect on the sides of the lamp. AISI 316 stainless steel screws. Rubber gasket. Equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. The Led circuit is self-dissipating. Built-in electronic ballast. All electronic ballasts are equipped with thermal and short-circuit protection, protection against overvoltage and overloading. EM version, in always-on mode, is equipped with an eco-friendly NiMH (nickel-metal hydride) battery, thanks to the absence of cadmium. The EM version is equipped with a battery status indicator Led.

SETTLEMENT CODE

Complete the code by entering the number corresponding to the desired color in the space provided


STANDARD COLORS



RAL 9016 - Matt white: **1**
RAL 9005 - Matt black: **7**

other colors on request

MASK



IP65	TYPE	POWER	FLUX ¹
	LED	14W	2200lm
	LED EM	14W	2200lm
	LED SHF	14W	2200lm

	CODE	
	CCT 3000°K CRI>90	CCT 4000°K CRI>90
	L094 <input type="checkbox"/> .W	L094 <input type="checkbox"/> .N
	L094 <input type="checkbox"/> .WE1	L094 <input type="checkbox"/> .NE1
	L094 <input type="checkbox"/> .WSHF	L094 <input type="checkbox"/> .NSHF



MASK can be personalized, on request, with a logo or an image.
The additional cost will be estimated for each project.