

ORIGAMI




by Arianna e Bruno Teardo



USE

LED

FEATURES



DESCRIPTION

Suspension lamp for direct non-glare lighting. Bent metal structure with laser-cut details. Painted metal top cover matching the color of the structure. Power cable covered in white PVC. All versions have the inside of the diffuser painted white to improve light reflection. Screen made of opal polycarbonate, specifically for Led, which combines maximum brightness with the ability to avoid the spot effect of Led. Equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut aluminium dissipating plate. Electronic ballast incorporated in the top cover. DM version equipped with dimmable ballast with DALI/PUSH interface. All electronic ballasts are equipped with thermal and short-circuit protection against overloading and overvoltage.

SETTLEMENT CODE


Complete the code by entering the number corresponding to the desired color in the space provided


STANDARD COLORS

- RAL 9005 - Matt black: **7**
- RAL 3003 - Matt red: **3**


other colors on request

ORIGAMI

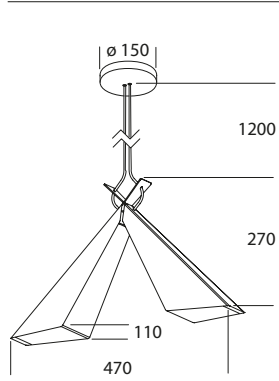

IP20	TYPE	POWER	FLUX ¹
	LED	20W	2440lm
	LED DM	20W	2440lm

Brightest LED versions on request


	CODE	
	CCT 3000°K CRI>90	CCT 4000°K CRI>90
	L104 <input type="checkbox"/> .W	L104 <input type="checkbox"/> .N
	L104 <input type="checkbox"/> .WD	L104 <input type="checkbox"/> .ND

Other version on request


¹Nominal luminous flux
LED DM: dimmable DALI - PUSH

ORIGAMI


by Arianna e Bruno Teardo

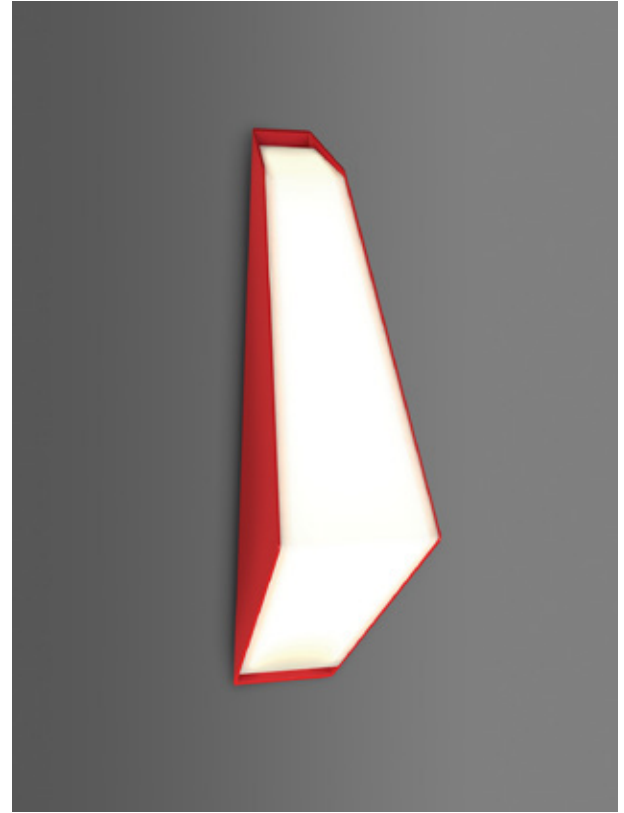


USE



LED



FEATURES



DESCRIPTION

Wall lamp for direct non-glare lighting. Metal base for wall installation with screw to fix the bent metal structure. Laser-cut details. All versions have the inside of the diffuser painted white to improve light reflection. Screen made of opal polycarbonate, specifically for Led, which combines maximum brightness with the ability to avoid the spot effect of Led. Equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut aluminium dissipating plate. Built-in electronic ballast. All the electronic ballasts are equipped with thermal and short-circuit protection, against mains overvoltage and overloading.

SETTLEMENT CODE


Complete the code by entering the number corresponding to the desired color in the space provided

STANDARD COLORS


- RAL 9005 - Matt black: **7**
- RAL 3003 - Matt red: **3**

other colors on request

ORIGAMI - AP




IP20



TYPE	POWER	FLUX ¹
LED	10W	1220lm

Brightest LED versions on request

CODE

	CCT 3000°K CRI>90	CCT 4000°K CRI>90
	L103 <input type="text"/> .W	L103 <input type="text"/> .N