

# PARK

by KD Lab





## USE

## LED



## FEATURES



## DESCRIPTION

Bollard for direct light. Post and structure in extruded aluminium alloy 6060/T6. Die-cast aluminium details. Polyester powder coating and phosphate treatment to increase corrosion resistance. Diffuser made of opal polycarbonate, specific for Led, which combines maximum brightness with the ability to avoid the spot effect of Led. AISI 316 stainless steel screws. Silicone gasket suitable to withstand very high temperatures. Led version equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut metal dissipating plate. Built-in electronic ballast. All electronic ballasts are equipped with thermal and short-circuit protection, protection against overvoltage and overloading. Supplied with a watertight electrical connection device.

**SETTLEMENT CODE**

Complete the code by entering the number corresponding to the desired color in the space provided


**STANDARD COLORS**




RAL 9007 - Embossed grey: **6**  
RAL 9005 - Embossed black: **7**  
Rust: **8**

other colors on request

**PARK 90**



IP65



TYPE

POWER

FLUX<sup>1</sup>

E27

1x12W\*

1x1320lm\*


LED

23W

3120lm

| CODE           |                                   |                                  |
|----------------|-----------------------------------|----------------------------------|
| Lightbulb icon | CCT 3000°K<br>CRI>90              | CCT 4000°K<br>CRI>90             |
|                | L111 <input type="checkbox"/> .IN | L111 <input type="checkbox"/> .W |

**PARK 180**

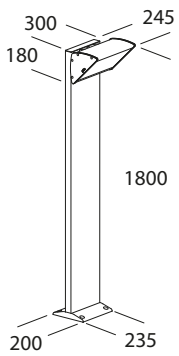

IP65



TYPE

POWER

FLUX<sup>1</sup>

E27

1x12W\*

1x1320lm\*

LED

23W


3120lm

| CODE           |                                   |                                  |
|----------------|-----------------------------------|----------------------------------|
| Lightbulb icon | CCT 3000°K<br>CRI>90              | CCT 4000°K<br>CRI>90             |
|                | L113 <input type="checkbox"/> .IN | L113 <input type="checkbox"/> .W |

Brightest LED versions on request

Other version on request

\*Suggested value - light source not supplied



<sup>1</sup>Nominal luminous flux

**SETTLEMENT CODE**

Complete the code by entering the number corresponding to the desired color in the space provided


**STANDARD COLORS**




RAL 9007 - Embossed grey: **6**  
RAL 9005 - Embossed black: **7**  
Rust: **8**

other colors on request

**PARK 92**



IP65



TYPE

POWER

FLUX<sup>1</sup>


E27  
LED

2x12W\*  
46W

2x1320lm\*  
6240lm

| CODE           |                                   |                                  |
|----------------|-----------------------------------|----------------------------------|
| Lightbulb icon | CCT 3000°K<br>CRI>90              | CCT 4000°K<br>CRI>90             |
|                | L112 <input type="checkbox"/> .IN | L112 <input type="checkbox"/> .W |

**PARK 182**

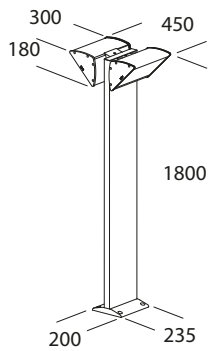

IP65



TYPE

POWER

FLUX<sup>1</sup>

E27  
LED

2x12W\*  
46W


2x1320lm\*  
6240lm

| CODE           |                                   |                                  |
|----------------|-----------------------------------|----------------------------------|
| Lightbulb icon | CCT 3000°K<br>CRI>90              | CCT 4000°K<br>CRI>90             |
|                | L114 <input type="checkbox"/> .IN | L114 <input type="checkbox"/> .W |

Brightest LED versions on request

Other version on request

\*Suggested value - light source not supplied



<sup>1</sup>Nominal luminous flux