


SOFFIO


by KD Lab




USE



LED

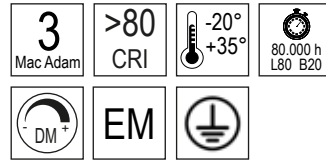

FEATURES

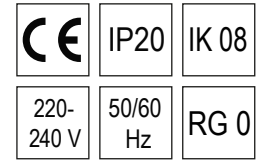

DESCRIPTION

Wall lamps for diffused and enveloping light. Diffuser in opal white polycarbonate sheet with a matt surface that makes the product impact resistant, unbreakable and easy to maintain, while maintaining the lightness of the material. White polycarbonate fixing base. Equipped with mains voltage Led circuit protected by a polycarbonate screen. High thickness aluminium dissipating plate. EM version, in always-on mode, is equipped with SMD Led circuit and environmentally friendly NiMH (nickel-metal hydride) battery thanks to the absence of cadmium. The EM version is equipped with a Led to signal the battery status and an oversized fixing base (H.30mm) in metal painted with matt white polyester powder.

SETTLEMENT CODE



Complete the code by entering the number corresponding to the desired color in the space provided


STANDARD COLORS


RAL 9016 - Matt white: **1**


other colors on request

SOFFIO

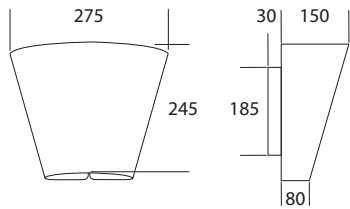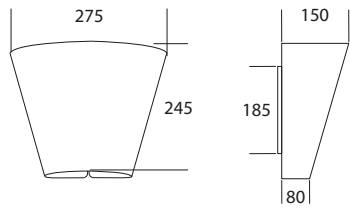


IP20	TYPE	POWER	FLUX ¹
	E27	1x12W*	1x1320lm*
	LED	17W	1700lm
	LED DM	17W	1700lm

IP20	TYPE	POWER	FLUX ¹
	LED EM	17W	1700lm

CODE	CCT 3000°K CRI>80	CCT 4000°K CRI>80
		

L124 <input type="text"/> .IN		
L124 <input type="text"/> .W	L124 <input type="text"/> .N	
L124 <input type="text"/> .WD	L124 <input type="text"/> .ND	

CODE	CCT 3000°K CRI>80	CCT 4000°K CRI>80
		

L124 <input type="text"/> .WE1	L124 <input type="text"/> .NE1
--------------------------------	--------------------------------

Brightest LED versions on request

Other version on request

*Suggested value - light source not supplied
LED EM: emergency 1h standard - 3h on request

¹Nominal luminous flux
LED DM: dimmable DALI - PUSH