


SPLIT


by Samuele Necchi




USE



LED

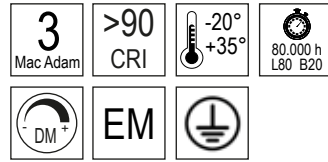

FEATURES



DESCRIPTION

Wall and ceiling lamp for diffuse and directional lighting. The diffuser turns 360° allowing the light beam to be directed. Structure in extruded aluminium alloy 6060/T6. Anodized aluminium or polished aluminium finish (chrome effect). Diffuser made of aniseed-colored polycarbonate, specific for Led, which combines maximum brightness with the ability to avoid Led effect. Transparent polycarbonate side caps with chrome-plated PVC inserts. Semi-transparent rubber gaskets. Equipped with SMD Led circuit with high color rendering index (CRI90) and high-energy efficiency. Laser-cut metal dissipating plate. Built-in electronic ballast. DM version equipped with dimmable power supply with DALI/PUSH interface. All the electronic ballasts are equipped with thermal and short-circuit protection, against overvoltage and overload. EM version, in always-on mode, is equipped with an environmentally friendly NiMH (nickel-metal hydride) battery, thanks to the absence of cadmium. The EM version is equipped with a battery status Led.

SETTLEMENT CODE

Complete the code by entering the number corresponding to the desired color in the space provided

STANDARD COLORS




Anodized aluminium: **6**



Polished aluminium (chrome effect): **0**

other colors on request

SPLIT 60 - SPLIT 60S

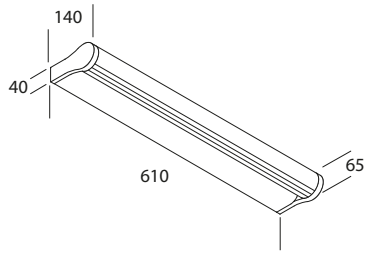

IP44



TYPE

POWER

FLUX¹

SPLIT 60

LED

12W

1810lm

LED EM

12W

1810lm

SPLIT 60S

LED

24W

3200lm

LED DM

24W

3200lm

LED EM

24W

3200lm

CODE



**CCT 3000°K
CRI>90**

**CCT 4000°K
CRI>90**

L127 .W

L127 .N

L127 .WE1

L127 .NE1

L128 .W

L128 .N


L128 .WD

L128 .ND



L128 .WE1

L128 .NE1

SPLIT 90 - SPLIT 90S

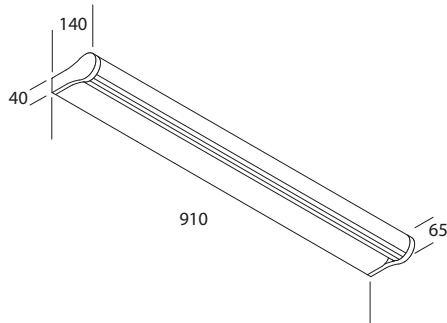

IP44



TYPE

POWER

FLUX¹

SPLIT 90

LED

17W

2700lm

LED DM

17W

2700lm

LED EM

17W

2700lm

SPLIT 90S

LED

35W

4900lm

LED DM

35W

4900lm

LED EM

35W

4900lm



**CCT 3000°K
CRI>90**

**CCT 4000°K
CRI>90**

L129 .W

L129 .N

L129 .WD

L129 .ND

L129 .WE1

L129 .NE1

L130 .W

L130 .N

L130 .WD

L130 .ND

L130 .WE1

L130 .NE1

Brightest LED versions on request

Other version on request

LED EM: emergency 1h standard - 3h on request

¹Nominal luminous flux
LED DM: dimmable DALI - PUSH

SETTLEMENT CODE

Complete the code by entering the number corresponding to the desired color in the space provided

STANDARD COLORS




Anodized aluminium: **6**

Polished aluminium (chrome effect): **0**

other colors on request


SPLIT 120 - SPLIT 120S

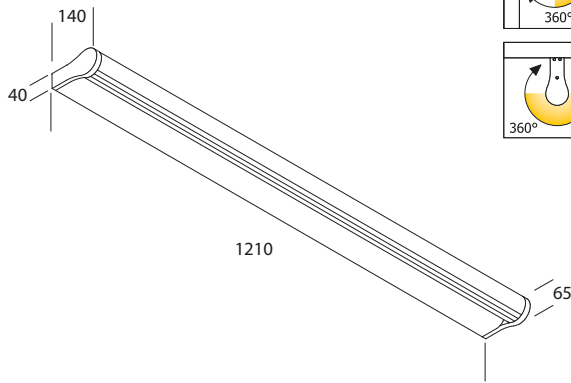

IP44	TYPE	POWER	FLUX ¹
	SPLIT 120		
	LED	24W	3620lm
	LED DM	24W	3620lm
	LED EM	24W	3620lm
	SPLIT 120S		
	LED	48W	6400lm
	LED DM	48W	6400lm
	LED EM	48W	6400lm

	CODE	
	CCT 3000°K CRI>90	CCT 4000°K CRI>90
	L131 <input type="checkbox"/> .W	L131 <input type="checkbox"/> .N
	L131 <input type="checkbox"/> .WD	L131 <input type="checkbox"/> .ND
	L131 <input type="checkbox"/> .WE1	L131 <input type="checkbox"/> .NE1
	L132 <input type="checkbox"/> .W	L132 <input type="checkbox"/> .N
	L132 <input type="checkbox"/> .WD	L132 <input type="checkbox"/> .ND
	L132 <input type="checkbox"/> .WE1	L132 <input type="checkbox"/> .NE1

SPLIT 150 - SPLIT 150S

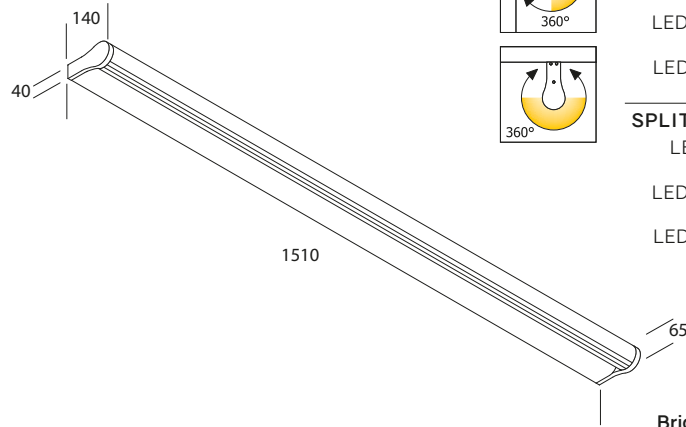

IP44	TYPE	POWER	FLUX ¹
	SPLIT 150		
	LED	29W	4500lm
	LED DM	29W	4500lm
	LED EM	29W	4500lm
	SPLIT 150S		
	LED	59W	8100lm
	LED DM	59W	8100lm
	LED EM	59W	8100lm

	CODE	
	CCT 3000°K CRI>90	CCT 4000°K CRI>90
	L133 <input type="checkbox"/> .W	L133 <input type="checkbox"/> .N
	L133 <input type="checkbox"/> .WD	L133 <input type="checkbox"/> .ND
	L133 <input type="checkbox"/> .WE1	L133 <input type="checkbox"/> .NE1
	L134 <input type="checkbox"/> .W	L134 <input type="checkbox"/> .N
	L134 <input type="checkbox"/> .WD	L134 <input type="checkbox"/> .ND
	L134 <input type="checkbox"/> .WE1	L134 <input type="checkbox"/> .NE1

Brightest LED versions on request

Other version on request

LED EM: emergency 1h standard - 3h on request

¹Nominal luminous flux
LED DM: dimmable DALI - PUSH